

Side Impact Neck Injury Criteria and Tolerances for Occupants of Sideward Facing Aircraft Seats



Authors:

Mat Philippens, Jac Wismans, Justyna Mordaka
Narayan Yoganandan, Frank Pintar
Stephen Soltis
Rick deWeese



CAMI

TNO | Knowledge for business



Presentation overview

Initial FAA Studies

Project Methodology

Neck injury criteria literature

Test matrix

Method

Subject responses

***injury specification
dynamics***

Injury Criteria - Tolerances

Conclusions

Discussion

References

Initial FAA Research Studies

Objective: Develop certification standards for sideward facing seats that provide a level of safety and impact protection equivalent to that afforded for occupants of forward or aft facing seats.



Example Business Jet Cabin Interior

The Problem

Videos Deleted

Project Methodology




***Literature Review
Injury Criteria and Tolerances***

***Computer Simulations with Human
Models and EuroSID-2 ATD***

***Post Mortem Human Subjects (PMHS)
Lateral Impact Sled Tests***

Validate Test and Certification Procedures

***Additional Sled Tests, Simulations, and
Analyses to Establish Lateral Impact
Tolerance Levels and Test Procedures***

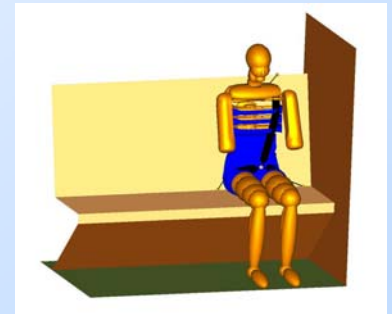

Video Deleted

Literature

Injury criteria and tolerances for lateral bending

Criteria	Tolerance range for neck		
	AIS 1	AIS 2	Soltis
Impact velocity	<40 km/h	30-60 km/h	
Impact acceleration	5-10 G	10-14.7 G	
Head angle	50-70 degrees	57-75 degrees	60 degrees
Head angular velocity	8-30 rad/s	32-39 rad/s	
Head angular acceleration	680-1460 rad/s ²	1588-2601 rad/s ²	2600 rad/s ²
Head linear acceleration	13-32 G	12.5-18 G	36 G
Neck bending moment	22.6-40.7 Nm	40.7-60 Nm	60 Nm
Tension	?	4170 N	4170 N
Compression	?	4000 N	4000 N
Shear force	240 N	>900 N	

AIS	Spine injury
1	Acute strain (no fracture)
2	Minor fracture, no cord involvement
3	Disc rupture, nerve root damage
4	Incomplete spinal cord, cord syndrom
5	Quadriplegia

Literature since 2003


Injury criteria and tolerances for lateral bending

Upper neck	AIS 1	AIS 2
Lateral bending moment [Nm]	132	180 67 47-60 Soltis (pre 2003)
Tension [N]	1500	2070 4170 Soltis (pre 2003)
Shear [N]	1693	2797 >900 (pre 2003)
Twist [Nm]		39




- McIntosh 2007 - Fréchède - Lund 2003

Test matrix conducted PMHS tests


Testno	Pulse	Config
<i>FAA23 WSU</i>	<i>9 g ^ 180 ms</i>	<i>Rigid seat - Side wall up to shoulder</i>
<i>FAA26 WSU</i>	<i>16 g ^ 180 ms</i>	<i>Rigid seat - Side wall up to shoulder</i>
<i>FNSC102 MCW</i>	<i>12.5 g [] 120 ms</i>	<i>Rigid seat - Max. torso restraint</i>
<i>FNSC104 MCW</i>	<i>12.5 g [] 120 ms</i>	<i>Rigid Seat - Max. torso restraint</i>
<i>FNSC109 MCW</i>	<i>12.5 g [] 120 ms</i>	<i>Real seat with armrest</i>
<i>FNSC110 MCW</i>	<i>12.5 g [] 120 ms</i>	<i>Real seat with armrest</i>
<i>FNSC115 MCW</i>	<i>8.5 g [] 120 ms (70% ΔV)</i>	<i>Real seat with armrest</i>
<i>FNSC116 MCW</i>	<i>8.5 g [] 120 ms (70% Δ V)</i>	<i>Real seat with armrest</i>

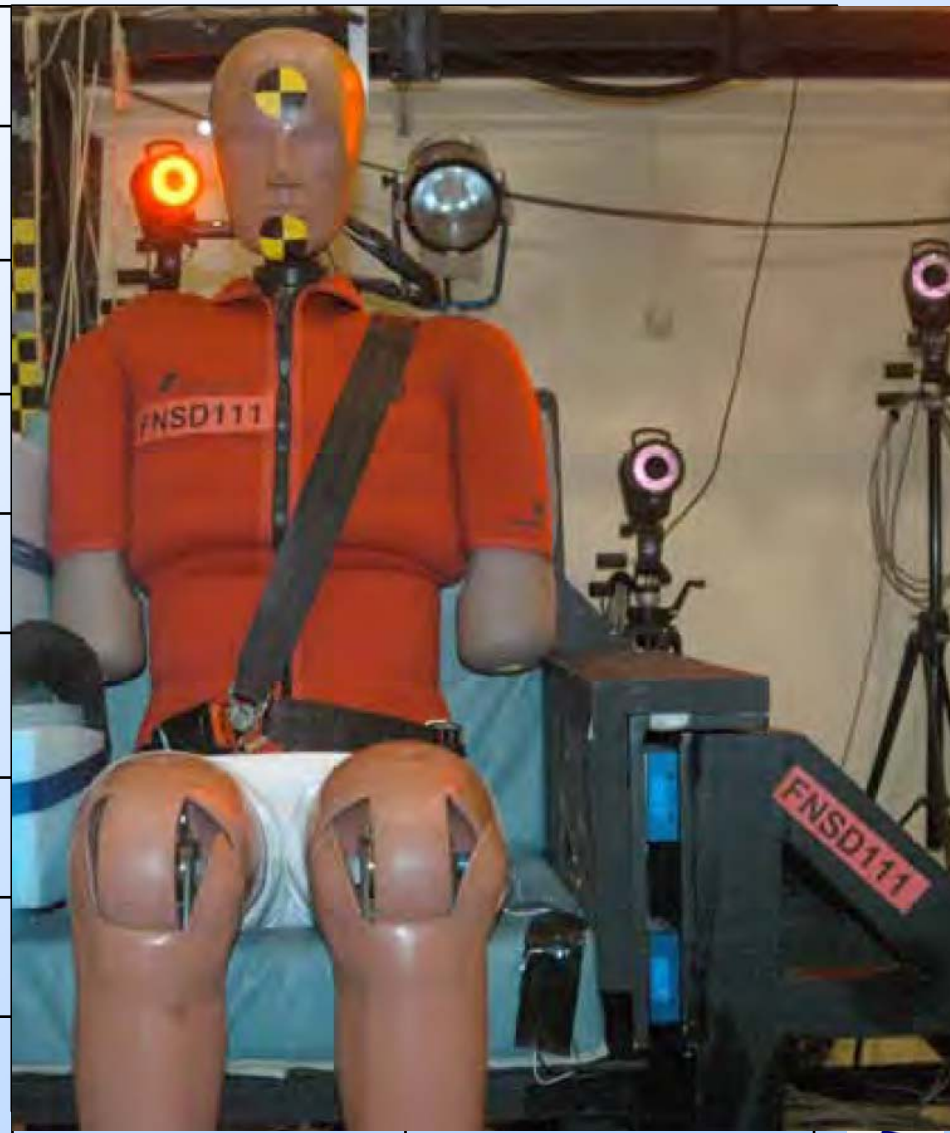


Experimental method

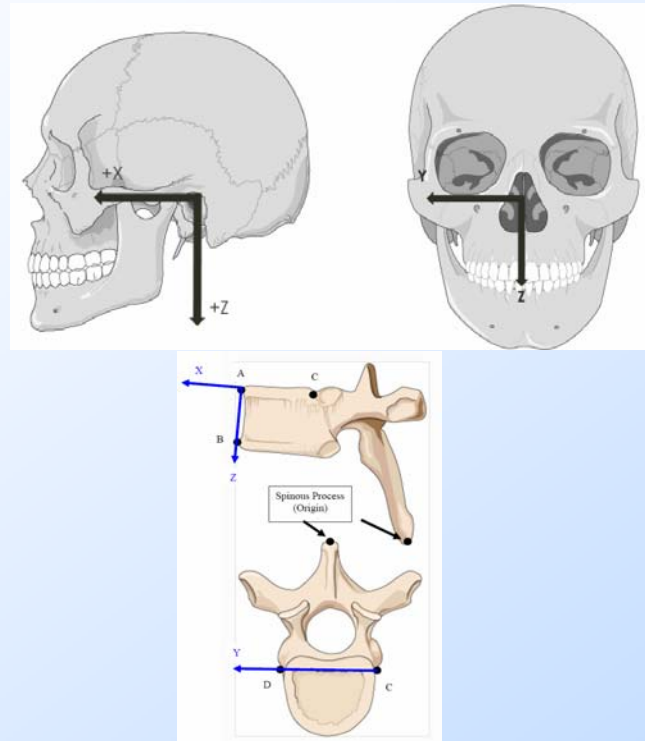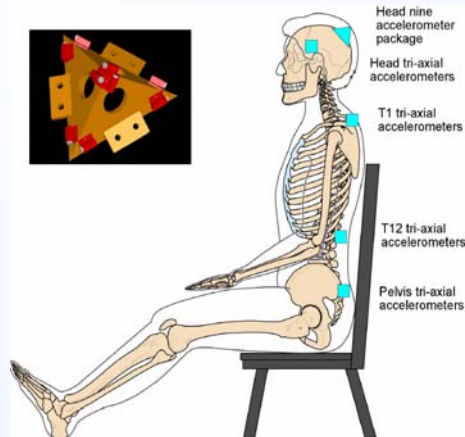

- (1) $F_{OCx} = ma_{CGx}$
- (2) $F_{OCy} = ma_{CGz}$
- (3) $F_{OCz} = ma_{CGz}$
- (4) $M_{OCx} = I_{Anatomicx} \alpha_x - r_{OC} \times F_{OC}$
- (5) $M_{OCy} = I_{Anatomyy} \alpha_y - r_{OC} \times F_{OC}$
- (6) $M_{OCz} = I_{Anatomicz} \alpha_z - r_{OC} \times F_{OC}$

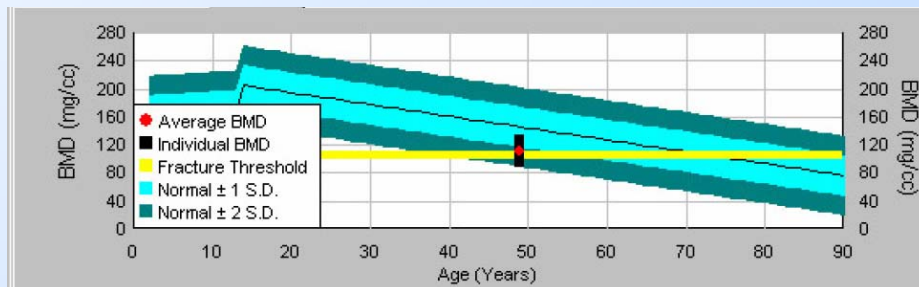

EuroSID and Instrumentation

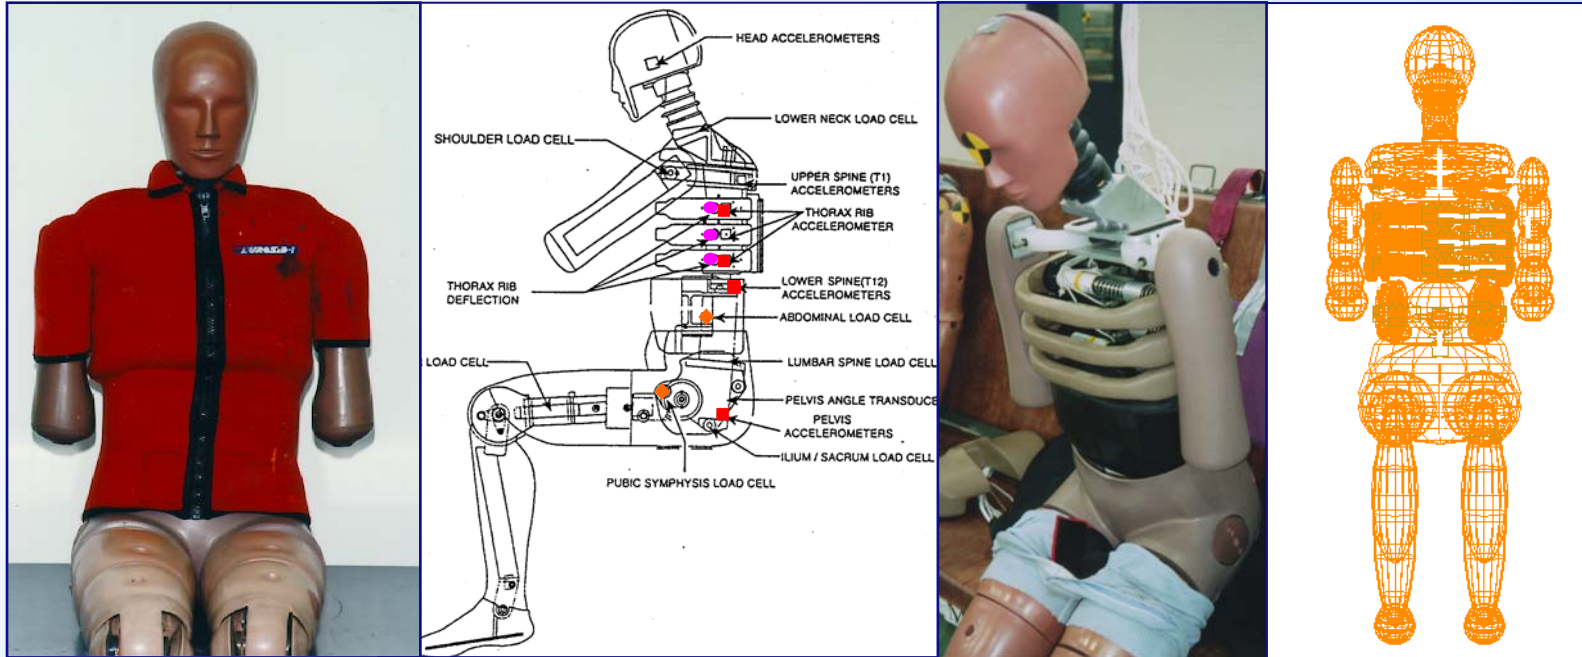

Accelerometers at(■)

Upper Rib
Lower Rib
Lower Spine
Pelvis

Potentiometers at (●)

Upper Rib
Middle Rib
Lower Rib

Load Cell at (◆)

Pubic
Lateral Abdomen

Test Condition

Test ID	% ΔV	Restraint	Seat
26 (WSU)	100	4-point	Rigid-wall
102	100	Full	Rigid
104	100	Full	Rigid
109	100	realistic	FAA
110	100	realistic	FAA
115	70	realistic	FAA
116	70	realistic	FAA

Department of Neurosurgery, Milwaukee, WI

Specimen Data

Test ID	Age (years)	Height (m)	Weight (kg)
102	55	1.88	86
104	49	1.85	70
109	59	1.68	64
110	55	1.84	76
115	57	1.82	81
116	47	1.75	80

Department of Neurosurgery, Milwaukee, WI

Subject Responses

Videos Deleted

MCW Injury Analysis



- Biomechanical engineering
- Clinical dx – palpation, etc.
- X-ray, CT, cryomicrotomy
- Pathological assessment
- Clinical interpretation
 - Pathologist, spine surgeon, ...
- Scoring and mechanism

Pre-test X-rays FNSC102



FNSC 102, rigid restraint

***Widening
facet joints
below C4***

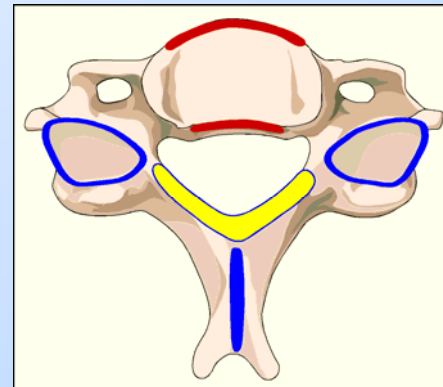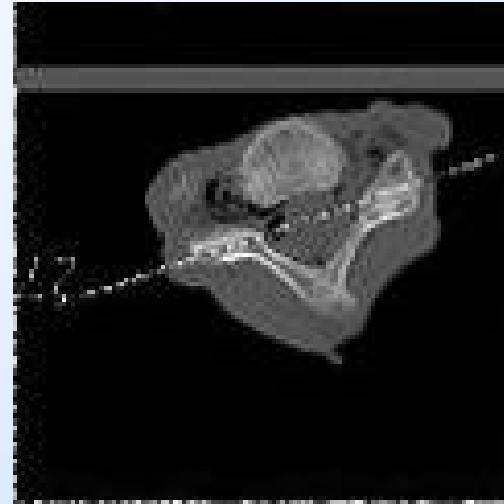

Department of Neurosurgery, Milwaukee, WI


FNSC 104 rigid restraint

Pre






Post

**Anterolisthesis
at C3**

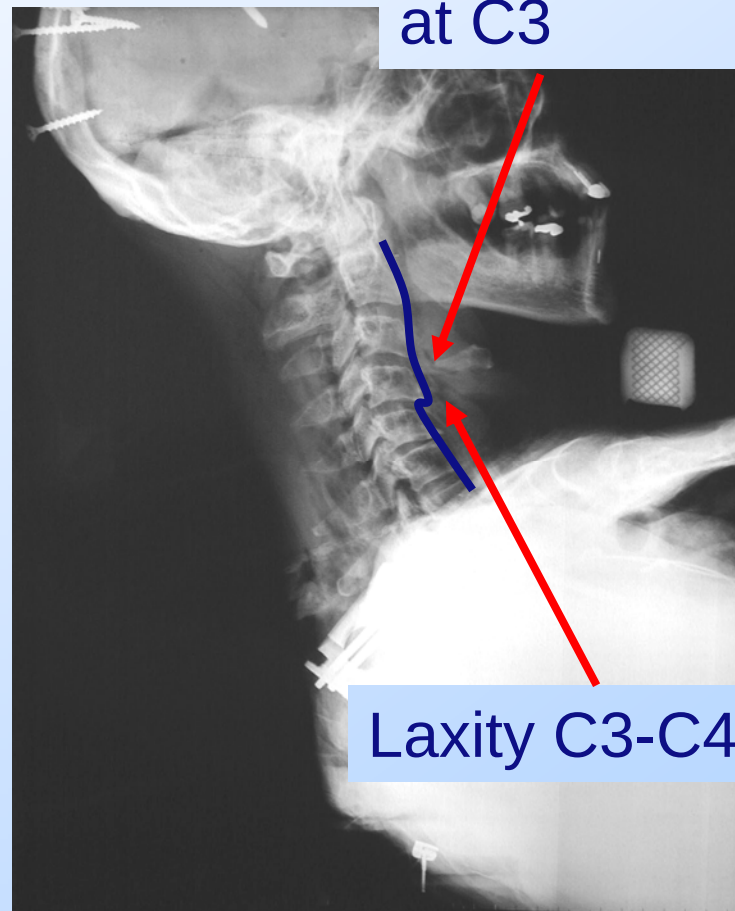

FNSC 104 rigid restraint

No malignment

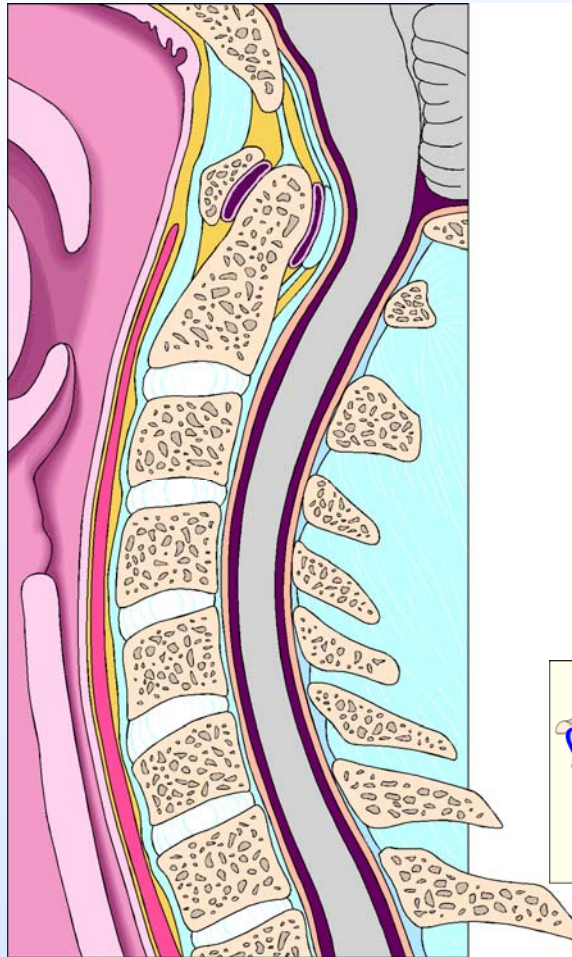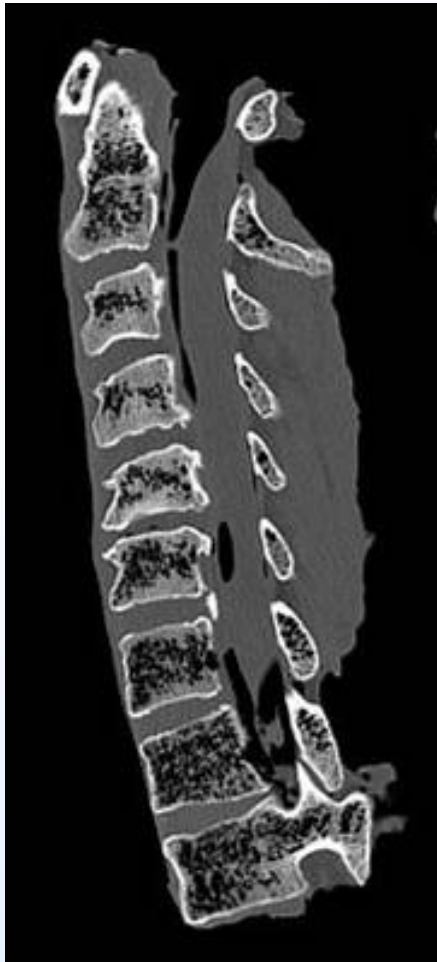



Cryomicrotome: ligament thinning

Department of Neurosurgery, Milwaukee, WI

Triennial Int. Aircraft Fire and Cabin Safety Research Conference 2007

New Jersey 30 OCT 2007

FNSC 109 3-point armrest

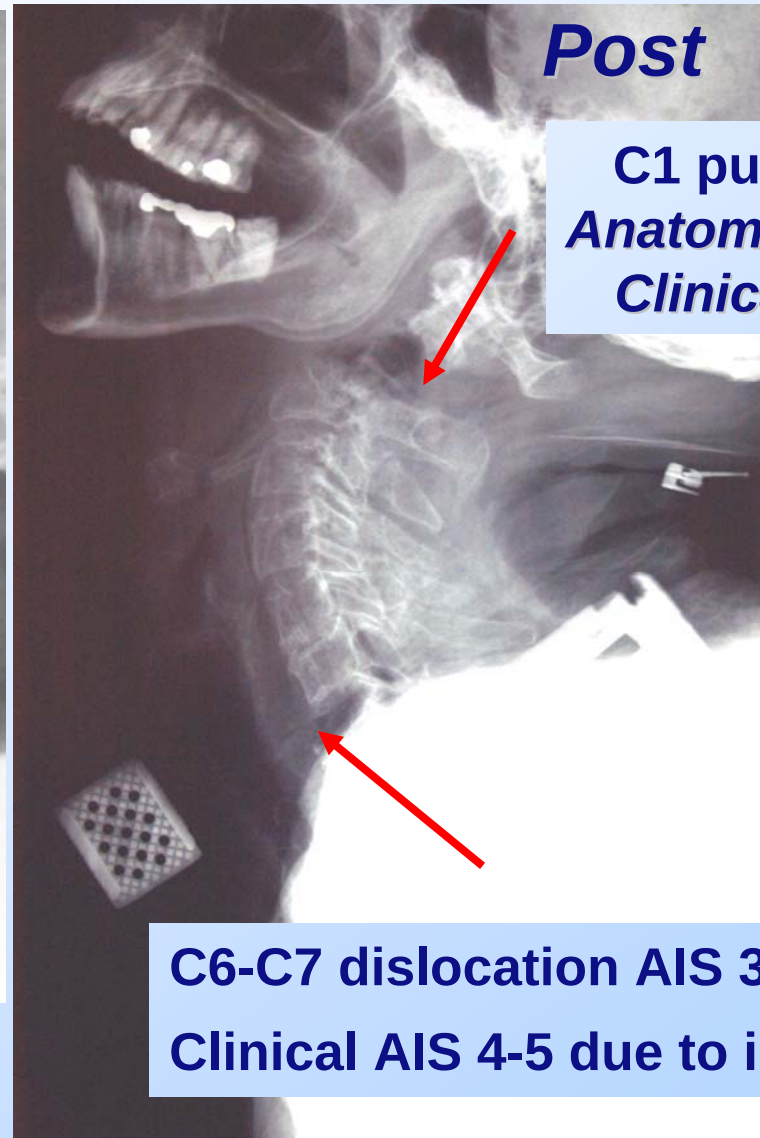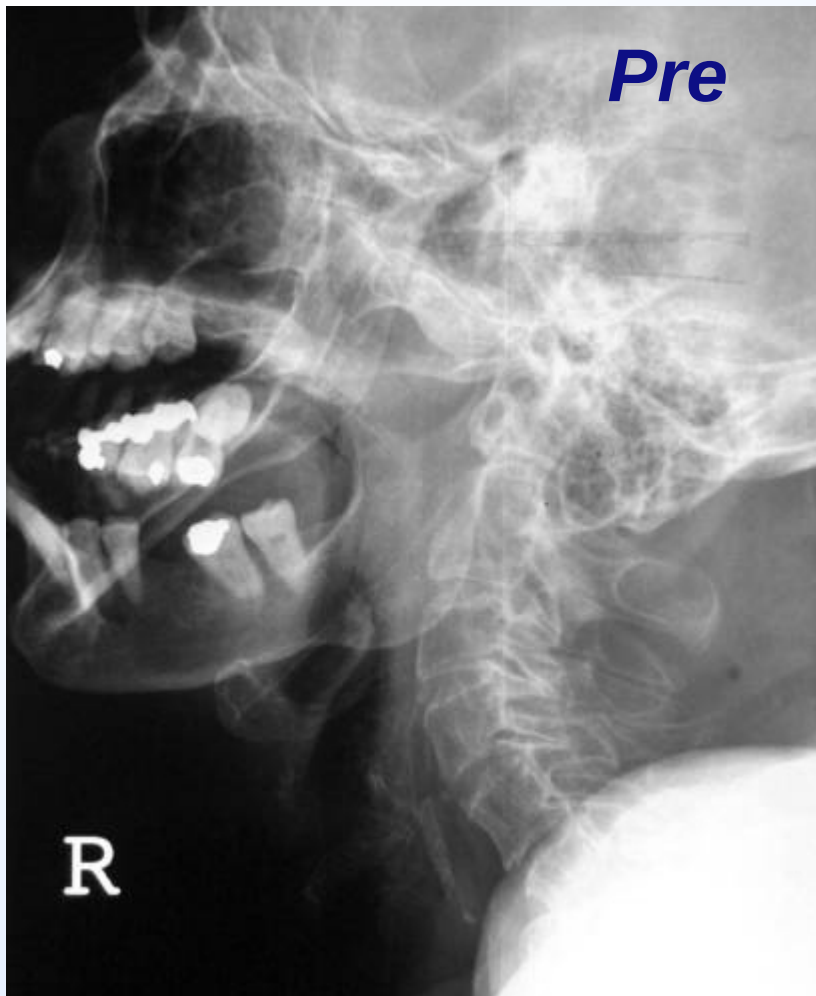


Department of Neurosurgery, Milwaukee, WI

FNSC 109 3 point armrest Injuries other body parts



***Femur
fracture
&
carotid
artery
injury
AIS 3***

FNSC 110 3 point arm rest

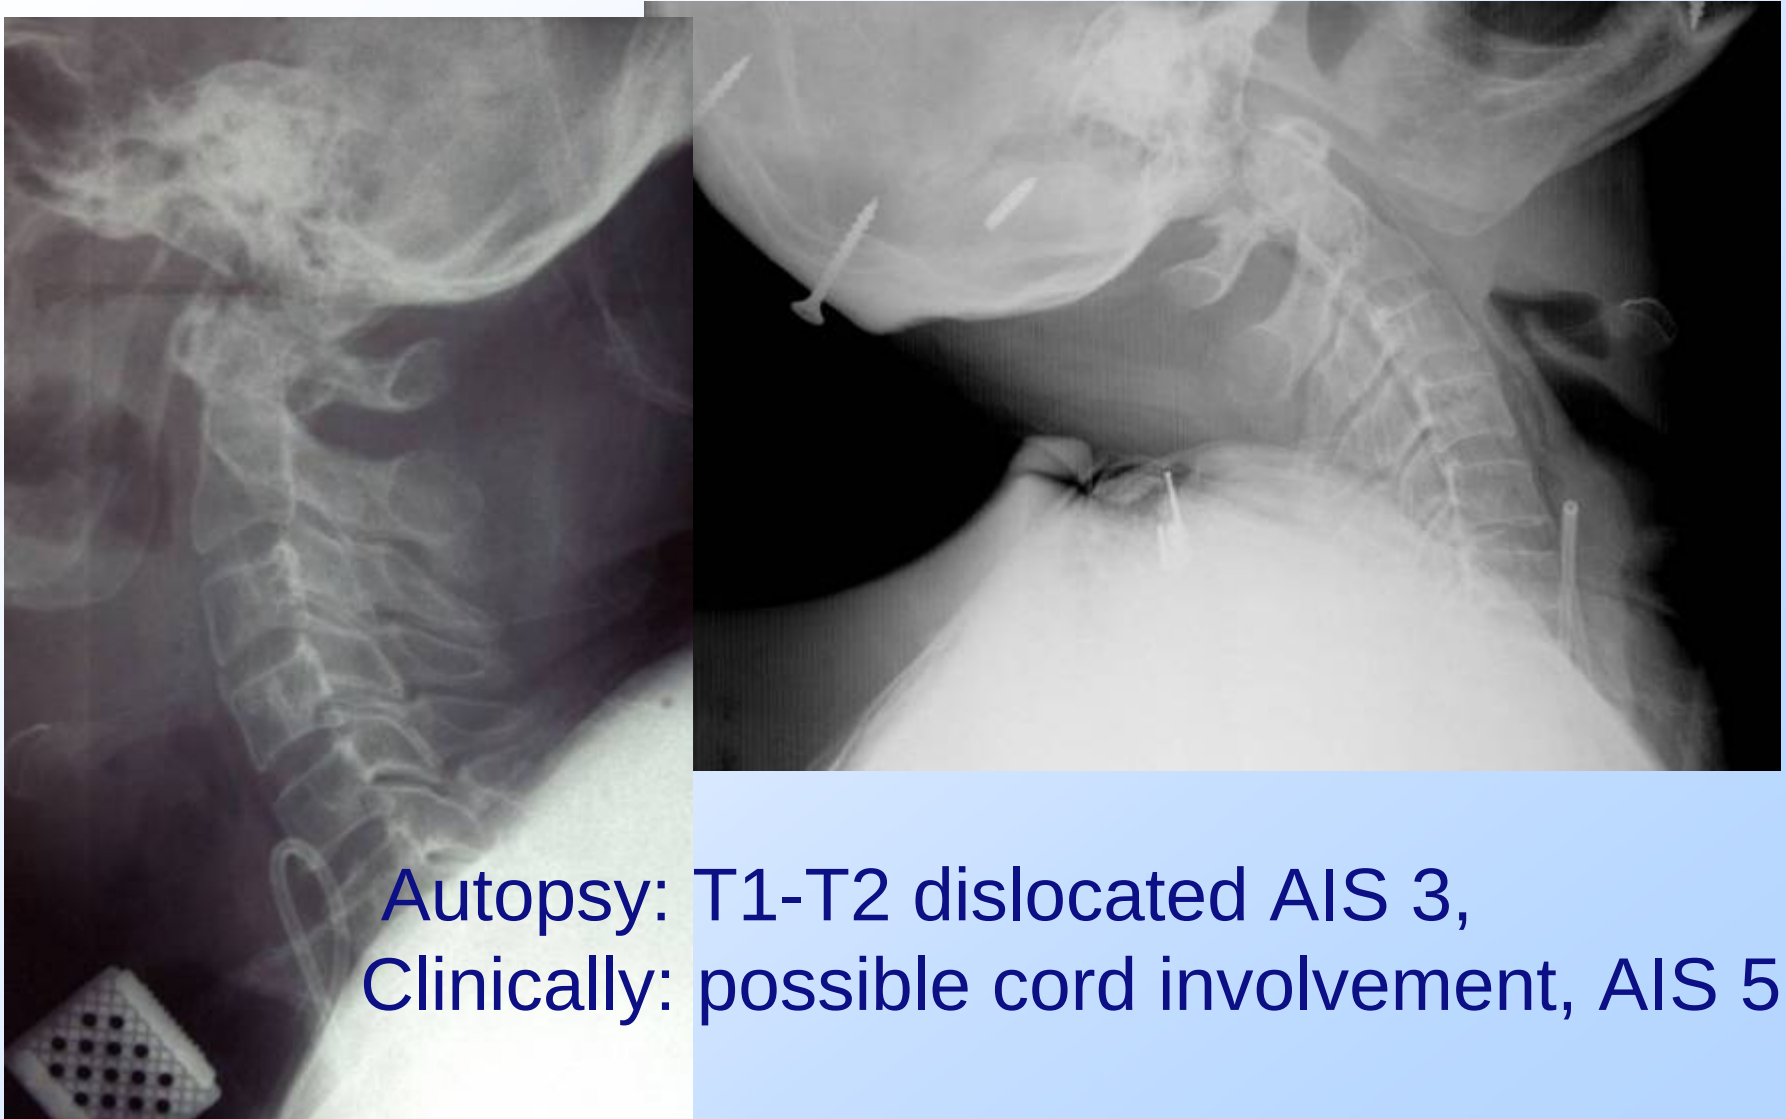

**Autopsy: T1-T2 dislocated AIS 3,
Clinically: possible cord involvement, AIS 5**


FNSC 110 3 point arm rest

Other body parts

- left distal (near knee) fracture,
(AIS 3, clinical 3)
- clavicle fracture
(AIS 2, clinical 2)
- flail chest
(AIS 3, clinical 4)
- left shoulder dislocation
 - (AIS clinical 2).




FNSC 115 3 point arm rest, 70 % pulse

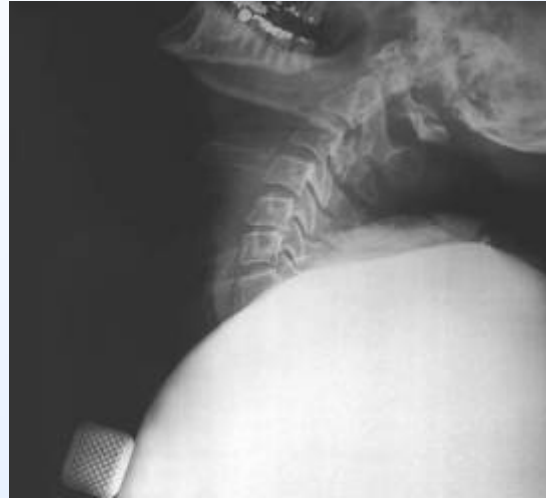

Pre

longitudinal
ligament
and disc C5-C6
distraction

subluxation C4 -C5

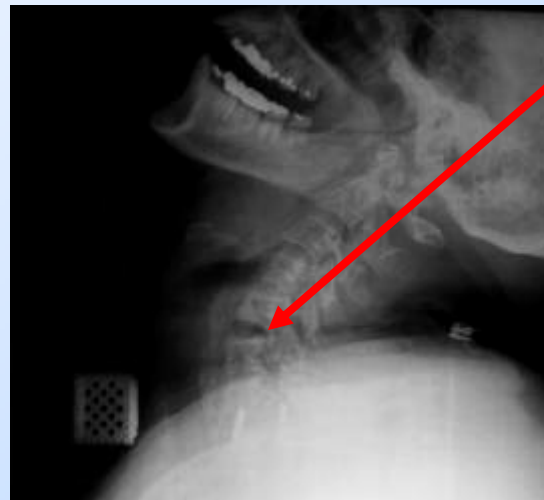

Post

AIS2 -AIS3


Summary injuries (1)

ID	Pathology
102	C4-T1 diastasis (widening)
103	C2-3 antreolisthesis (subluxation) C3-4 joint laxity, C6-7 ligament thinning
109	C2 fx/dislocation, C6-7 joint dislocation, carotid artery intimal tear, rib fractures, femur fracture
110	T1-2 fx/dislocation, clavicle fx, rib fractures, left shoulder dislocation, left distal femur fx
115	Ant long. ligament, disc C5-6, C4-5 subluxation
116	None


Summary injuries (2)

ID	% ΔV	AIS (neck)	Clinical (neck)	Other region	Brain (rad/s ²)
102	100	0	1	0	3230
103	100	0	1	0	-
109	100	3	5	4	2260
110	100	3	5	4	2550
115	70	2	3		1810
116	70	0			1750

OC max load Tension Lateral Bending

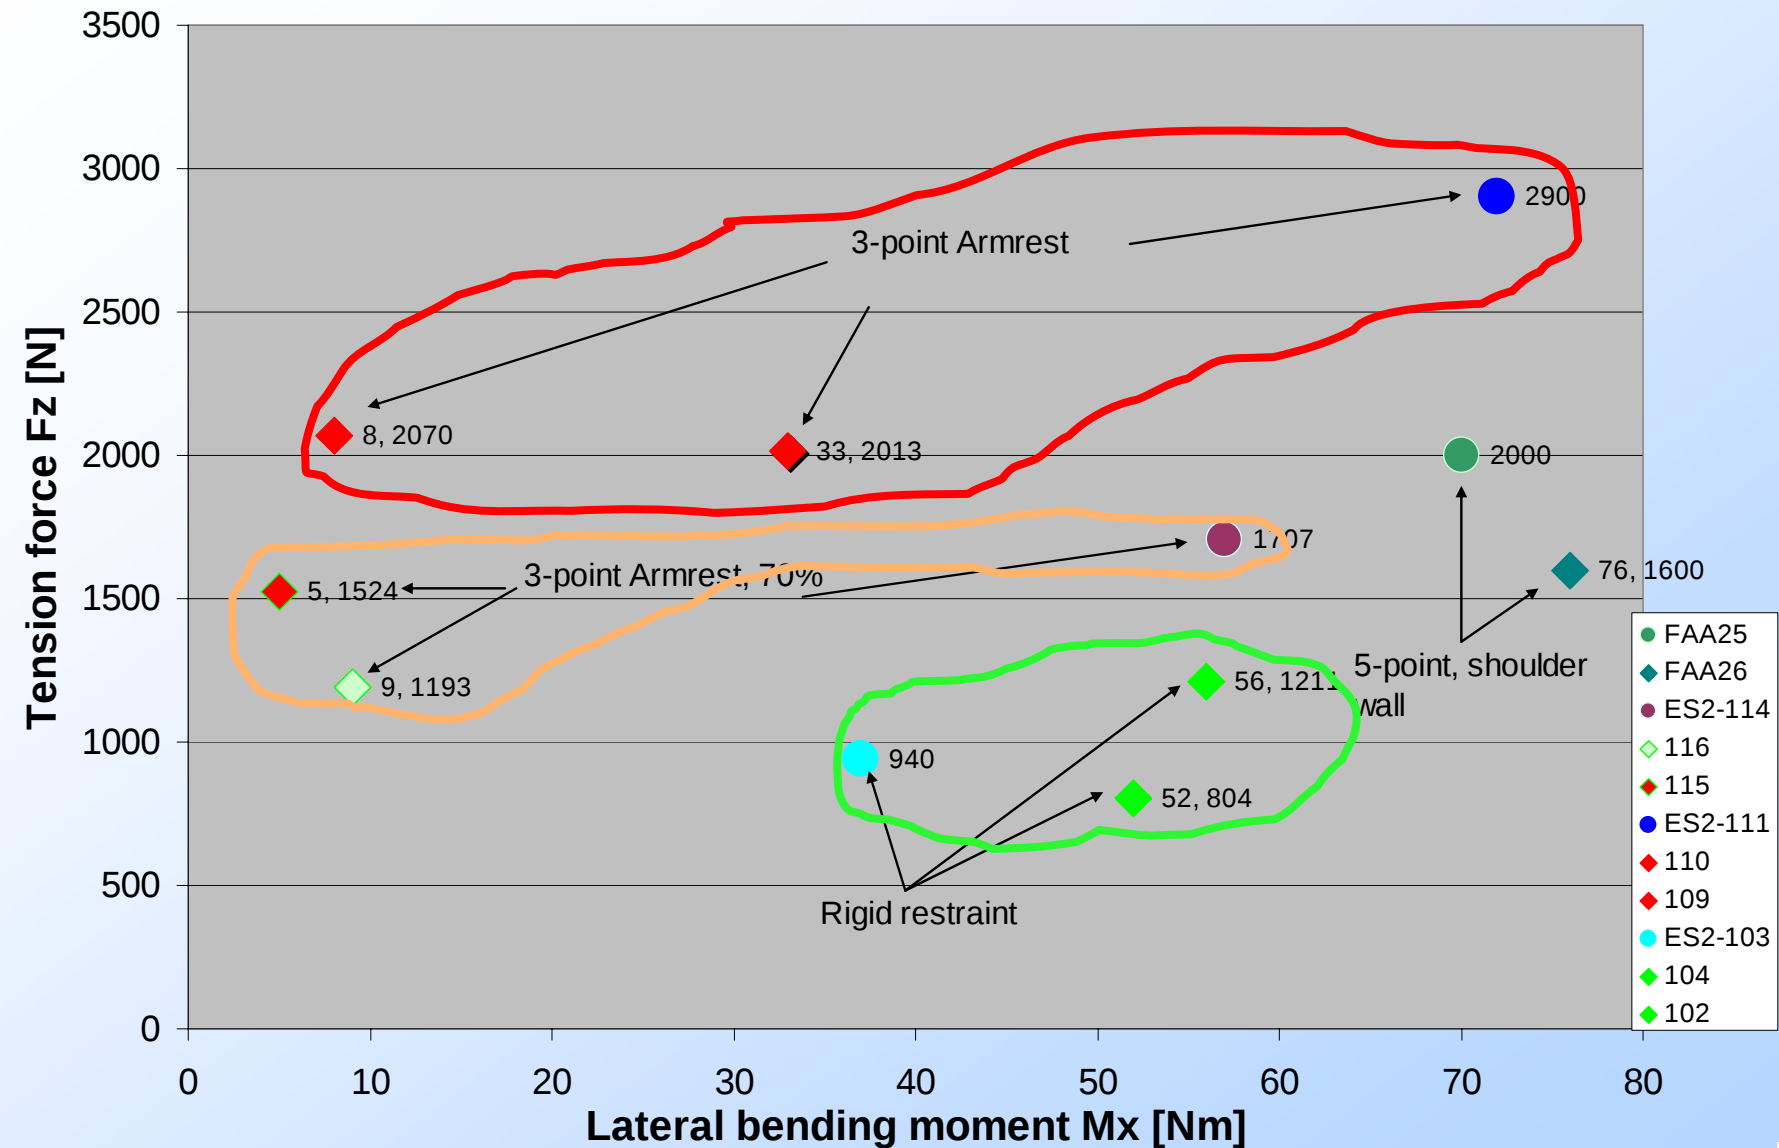

ES-2 Tension force - lateral bending moment

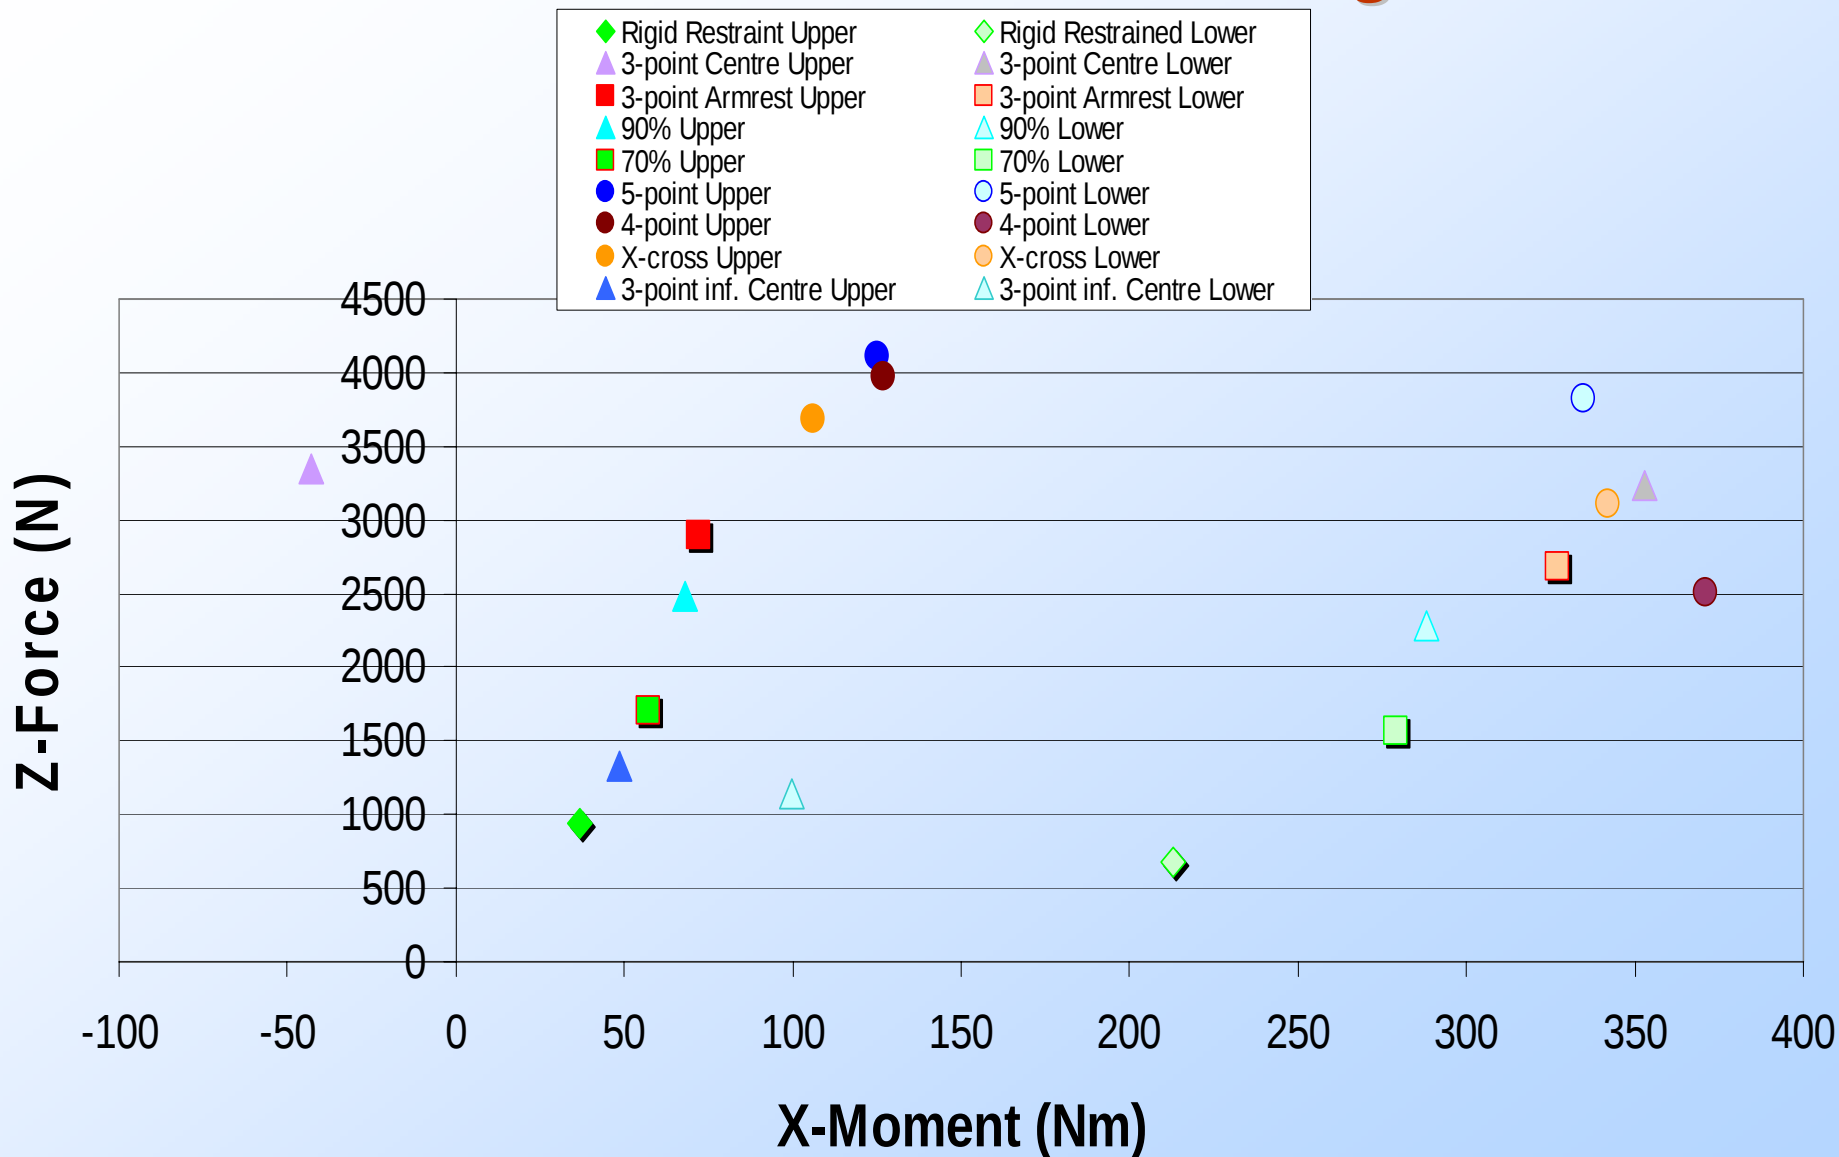

Conclusions Injury risk

- Serious neck injuries (AIS4+) are likely to happen in side facing seats under FAR25 crash pulse conditions, armrest and centre location;
- Additional injuries to be expected:
 - rib fracture
 - femur /hip fractures (armrest location)
 - carotid intimal tear
- Near side wall locations will induce serious rib fractures but no gross neck injury
- Head angular accelerations are likely to cause up to one hour unconsciousness

Conclusions injury criteria-tolerance ES2

- Neck tension loads above 2000 N combined with a minimum lateral bending moment 20-40 Nm appears to be an AIS3+ tolerance limit in PMHS
- ES2 lower neck loads appear to be a good predictor for AIS3+ injuries, tension force ~1600-2000 N, bending moment ~ 280 Nm
- Keeping head-thorax aligned appears promising in reducing neck injury risk e.g. inflatable shoulder belt, seat integrated airbags

Discussion

- The injury patterns found in the back-to-back PMHS tests are almost identical indicating a most likely non-subject specific injury response. Although the number of specimens are statistically not significant;
- The C1-C2 injury is most unusual and seems to be caused by a different injury mechanism as the simultaneously found C6-T1 injuries;
- ES2 neck dynamics are not validated against humans, which is illustrated by the high bending moments found in ES 2 compared to the values in the PMHS;

Discussion

- Keeping head-thorax aligned appears promising in reducing neck injury risk e.g. inflatable shoulder belt, seat integrated airbags. However, timing, general application for all aircraft types etc. need to be evaluated to ensure no additional injury risk induced by such systems;
- At the very moment a simulation study is done to find experimental conditions which generate a high bending moment with tension forces below ~ 1500 N to find a critical value for “bending only”

THANK YOU

References

- Association for the Advancement of Automotive Medicine, Committee on Injury Scaling (1990), *The Abbreviated Injury Scale 1990 (AIS-90)*. Des Plaines, IL: Association for the Advancement of Automotive Medicine;
- Bendjellal F., Tarriere C., Gillet D., Mack P., Guillon F (1987), *Head and Neck responses under high G-level lateral deceleration*, SAE paper 872196;
- Cusick J.F., Yoganandan N. (2002) *Biomechanics of the cervical spine 4: major injuries*. Clinical Biomechanics 17 (2002), 1-20;
- Federal Aviation Regulation 25.562 (1988) *Part 25 Airworthiness Standards: Transport Category Airplanes, Subpart C – Structure, Sec. 25.562 – Emergency Landing Conditions*
- Federal Aviation Regulation 25.785 (1996) *Part 25 Airworthiness Standards: Transport Category Airplanes, Subpart D – Design and Construction, Sec. 25.785 – Seats, berths, safety belts and harnesses;*
- Fréchède B., Bertholon N., Le Cos J.Y., Lavaste F., Skalli W. (2005), *Finite Element model of the human neck during omni-directional impacts*. Biomechanics of impact, pages 463-485;
- Hartwig E., Kettler A., Schultheiss M., Kinzi L., Claes L., Wilke H.J. (2004) *In vitro low speed side collisions cause injury to the lower spine but do not damage alar ligaments*. EUR Spine J. (2004) 13:590-597;
- Kettler A., Fruth K., Claes L., Wilke H.J. (2006) *Influence of the crash pulse shape on the peak loading and the injury tolerance levels of the neck in vitro low-speed side-collisions*. J. of Biomechanics 39 (2006) 323-329;
- Lankrani H.M., Kishore P., Murthy A., Gowdy V., DeWeese R. (1999) *Compliance criteria for side facing aircraft seats*, SAE paper 1999-01-1598;
- Lund A.K. (2003) *Recommended procedures for evaluating occupant injury risk from deploying side airbags*. Side Airbag Out-Of-Position Injury Technical Working Group
- Maltese M.R., Eppinger R.H., Rhule H., Donnelly B., Pintar F.A., Yoganandan N. (2002), *Response Corridors for Human Surrogates in Lateral Impact*. Stapp Car Crash Journal, Vol. 46 (November 2002);
- McIntosh A.S., Kallieris D., Fréchède B., (2007) *Neck Injury tolerance under inertial loads in side impacts*. Accident Analysis and Prevention 39 (2007) 326-333;
- Pintar F.A., Yoganandan N., Sances A., Reinartz J., Larson S.J., Harris G. (1989) *Kinematic and anatomical analysis of the human cervical spine under axial loading* Proc. Stapp Conf. 33rd Washington DC, Paper no 892436, pp 55-72
- Pintar F.A., Sances A., Yoganandan N., Reinartz J., Maiman D.J., Suh J.K., Unger G., Cusick J.F., Larson S.J. (1990) *Biodynamics of the total human cadaveric cervical spine*, Proc. Stapp Conf. 34th, Orlando Fla., Paper no. 902309, pp.55-72, Warrendale, PA:Soc. Automot. Eng.;
- Soltis S.J. (2001) *An overview of existing and needed Neck Impact Injury Criteria for Sideward Facing Aircraft Seats* The Third Triennial International Aircraft and Cabin Safety Research Conference, October 22-25,2001;
- Soltis S.J., Frings G., Van Gowdy R., van Hoof J., Meijer R., Yang K.H. (2003) *Development of Side impact Neck Injury Criteria and Tolerances for Occupants of Sideward Facing Aircraft Seats*. Nato/PFP unclassified paper RTO-MP-AVT-097
- Sperber M., Schuller E., Schroth C.J. (1997) *Crashworthiness of Side-Facing seating positions in Aircrafts, Biodynamics Stresses and Maximum Strain Criterion*.SAE paper No. 971456